


Shen zhen Shi Xin Nan Tian Industrial Co., http://www.sznantian.com

由 Autodesk 教育版产品制作

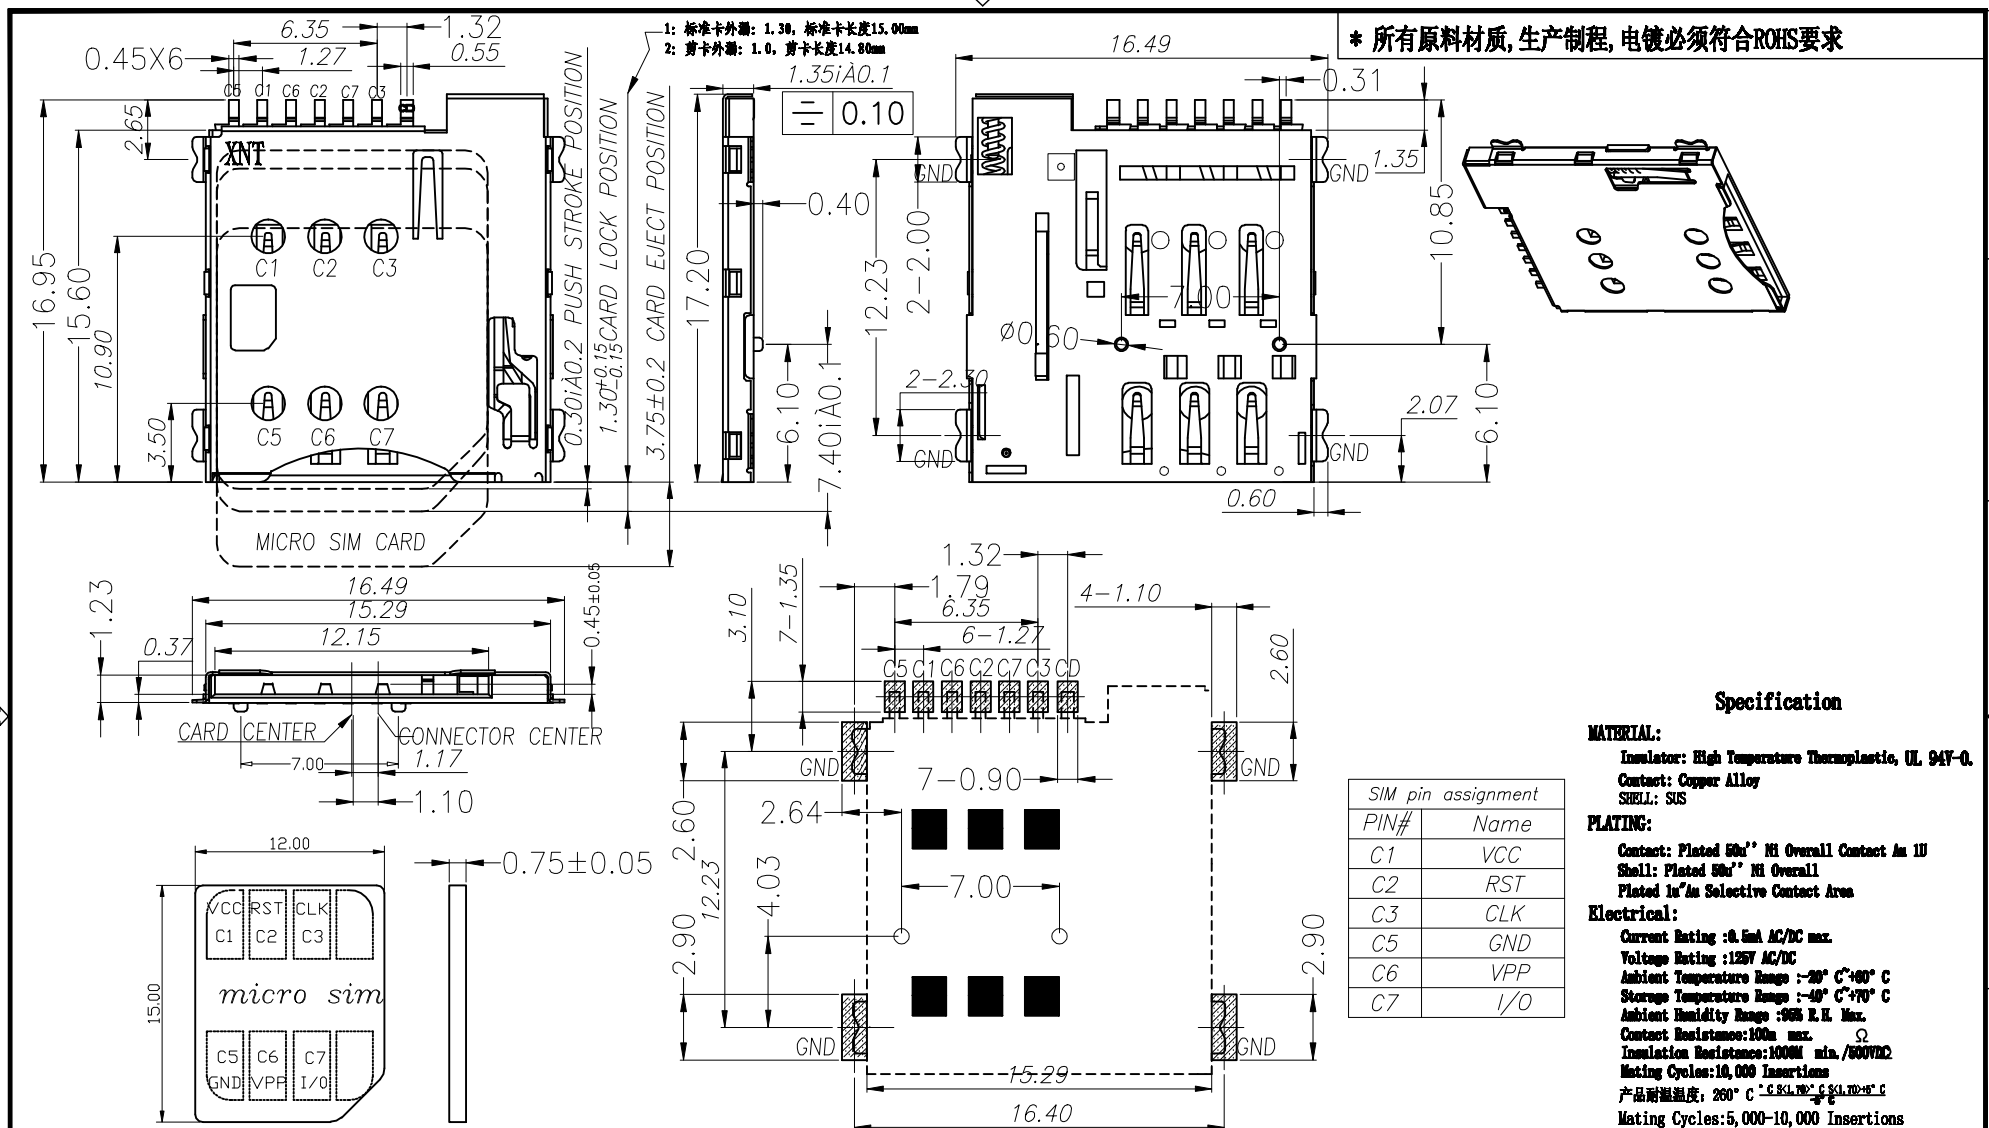


Specification

MATERIAL:
 Insulator: High Temperature Thermoplastic, UL 94V-0
 Contact: Copper Alloy
 SHELL: SUS

PLATING:
 Contact: Plated 50i" Ni Overall Contact Au 1U
 Shell: Plated 50i" Ni Overall
 Plated 1i" Au Selective Contact Area

Electrical:
 Current Rating :0.5mA AC/DC max.
 Voltage Rating :125V AC/DC
 Ambient Temperature Range :-20° C~+60° C
 Storage Temperature Range :-40° C~+70° C
 Ambient Humidity Range :95% R.H. Max.
 Contact Resistance:100m Ω
 Insulation Resistance:1000M Ω min./500VDC
 Mating Cycles:10,000 Insertions
 产品耐插温度: 200° C
 Mating Cycles:5,000-10,000 Insertions

SIM pin assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

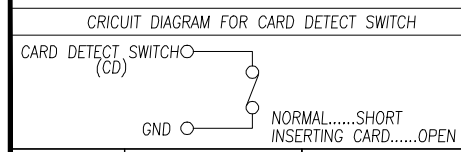

PCB 焊盘区
 下沉避位区
 RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCE ±0.05



深圳市鑫南天科技有限公司
 Shen zhen Shi Xin Nan Tian Industrial Co., Ltd

REVISE NO.	REV.	DESCRIPTION	DATE
1			
2			

DIMENSIONING UNIT: mm UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCE LXX: ± 0.15 LXXI: ± 0.30 LXXX: ± 0.05 ANGULAR: ± 1°	PRODUCT NAME: MICRO-SIM 卡座/PUSH/PUSH 1.35iA0.1 GND PIN 剪卡 PRODUCT NO.: 0121CAA07A DRAWING NO.: XNT-0013	DRAWING: COCO CHECK: JANY APPROVED: 林心祥 SCALE: 1:1 DWG. ID: C3 REV.: A	DATE: 2012/04/10 DATE: 2012/04/11 DATE: 2012/04/11 PAGE: 1 of 1
	深 圳 市 鑫 南 天 科 技 有 限 公 司 Shen zhen Shi Xin Nan Tian Industrial Co., Ltd		
	DIMENSIONING UNIT: mm UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCE LXX: ± 0.15 LXXI: ± 0.30 LXXX: ± 0.05 ANGULAR: ± 1°		
	PRODUCT NAME: MICRO-SIM 卡座/PUSH/PUSH 1.35iA0.1 GND PIN 剪卡 PRODUCT NO.: 0121CAA07A DRAWING NO.: XNT-0013		