
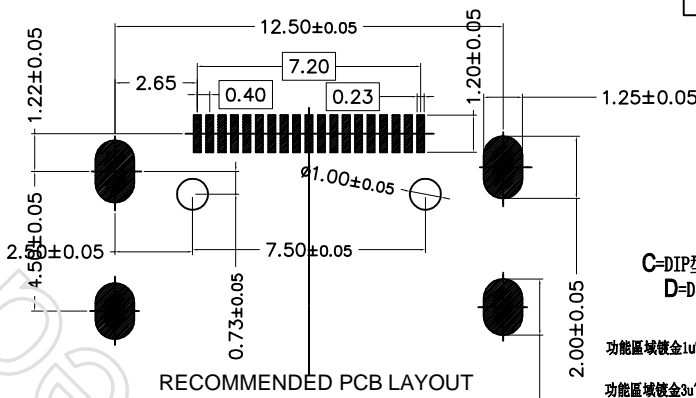


\* 所有原料材质, 生产制程, 电镀必须符合ROHS要求

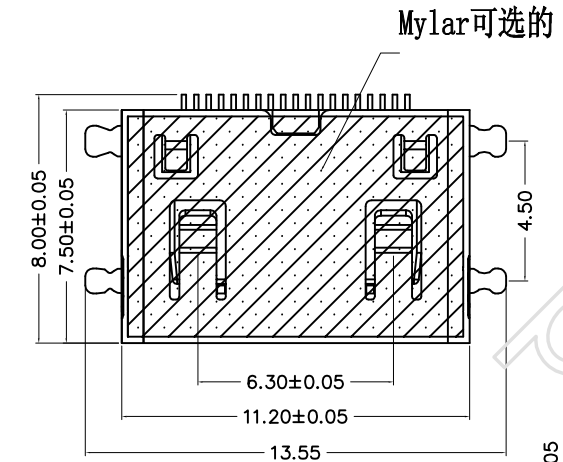





PART NO.

002 1 \* A A \* 19 \*

- 流水码
- A=DIP型外壳
  - B=SMT型外壳
  - C=DIP型外壳表面有J&K LOGO
  - D=DIP型外壳, 表面有Mylar

- Q= 外壳全部镀金1U"
- R= 外壳100μ"可溶性镀Ni

- 功能区域镀金1u" 焊接脚光亮锡100u" (符合ROHS制程) A=
- 功能区域镀金3u" 焊接脚光亮锡100u" (符合ROHS制程) B=
- 功能区域镀金1u", 锡脚镀金1u" (符合ROHS制程) G=
- 功能区域镀金3u", 锡脚镀金1u" (符合ROHS制程) H=
- 功能区域镀金15u", 锡脚镀金1u" (符合ROHS制程) K=

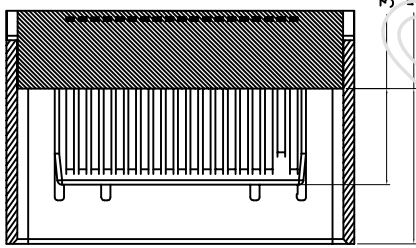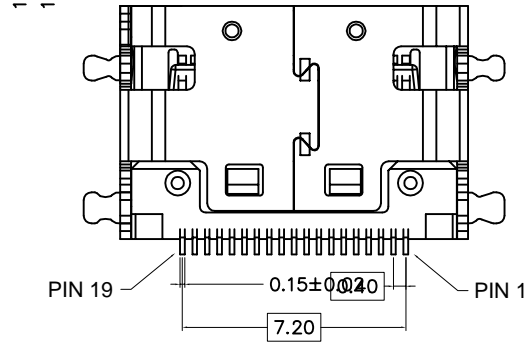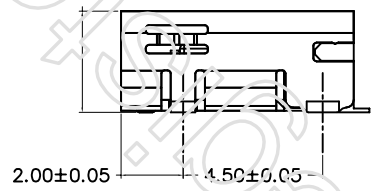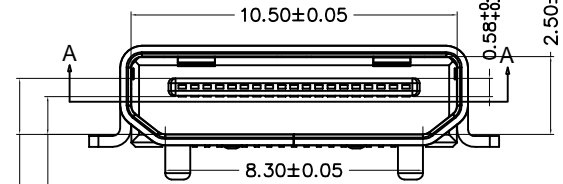

SEC A-A  
SCALE 1:1

SPECIFICATION:

1. MATING FORCE: 44.1N MAX
2. UNMATING FORCE: 7-25N
3. DURABILITY: 5000 CYCLES MIN
4. CURRENT: 0.5A
5. VOLTAGE: 40V MAX
6. WITHSTANDING VOLTAGE: 500V AC MIN. (UNMATED)
7. CONTACT RESISTANCE: 30MΩ MAX.
8. INSULATION RESISTANCE: 100MΩ MIN. (UNMATED)
9. OPERATING TEMPERATURE RANGE: -20.C TO +85.C
10. ALL THE MATERIAL SHOULD COMPLY WITH THE ROHS REQUIREMENT.

Type C pin	Signal Name
1	TMS Data2 Shield
2	TMS Data2+
3	TMS Data2-
4	TMS Data1 Shield
5	TMS Data1+
6	TMS Data1-
7	TMS Data0 Shield
8	TMS Data0+
9	TMS Data0-
10	TMS Clock Shield
11	TMS Clock+
12	TMS Clock-
13	DDC/CEC Ground
14	CEC
15	SCL
16	SDA
17	Utility
18	+5V Power
19	Hot Plug Detect

深圳市鑫南天科技有限公司  
Shen zhen Shi Xin Nan Tian Industrial Co., Ltd

PRODUCT NAME :  
**MINI-HDMI 19Pin SMT C TYPE**

PRODUCT NO. :  
0021\*AA\*19\*

DRAWING NO. :  
NT-004

DIMENSIONS INIT: mm	DRAWING: <b>COCO</b>	DATE: 2008/12/10	
UNLESS OTHERWISE SPECIFIABLE	CHECK: <b>JANY</b>	DATE: 2008/12/10	
DIMENSION TOLERANCE	APPROVED: <b>JEFF</b>	DATE: 2008/12/10	
X.X: ± 0.25	SCALE: 1:1	DWG ID: P D	REV.: A
X.XX: ± 0.10			PAGE: 1 of 2
X.XXX: ± 0.05			
ANGULAR: ± 1°			

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				

由 Autodesk 教育版产品制作

由 Autodesk 教育版产品制作