




* ROHS Compliant

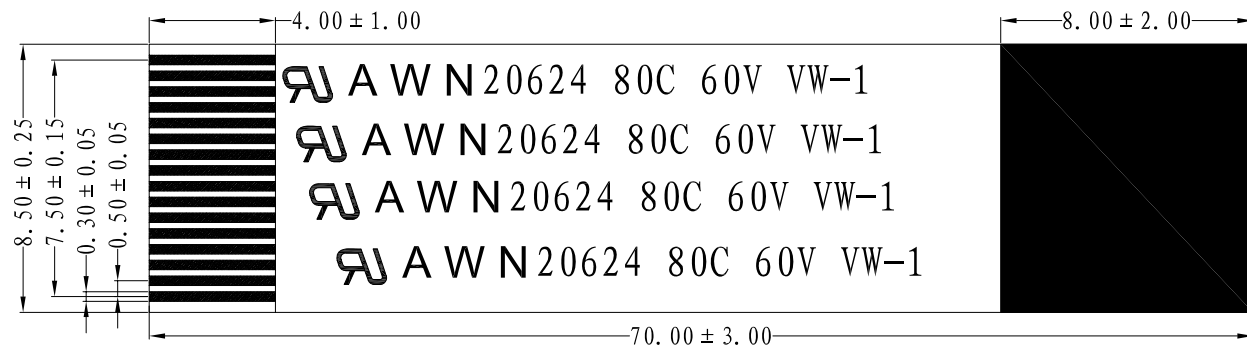

- NOTE:
- 1.Storage Condition:
 - 1.1 Temperature:15 ~ 25°C;
 - 1.2 Humidity :30~60%
 - 1.3 Operation temperature: -30'~+80'C
 - 2.Electrical Characteristics:
 - 2.1 Current rating: 0.1A
 - 2.2 Voltage rating: 60V
 - 2.3 Contact resistance: 320mΩ/meter Max.
 - 2.4 Insulation Resistance: DC500V 1minutes
 - 3.Mechanical Characteristics:
 - 3.1 Durability: 20 cycles
 4. RoHS compliant

		深圳市鑫南天科技有限公司 Shen Zhen Xin Nan Tian Technology Co., Ltd					
		DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE		PRODUCT NAME : FFC cable 0.5pitch 16Pin 70mm length		DRAWING: COCO	DATE: 2015/09/01
DIMENSION TOLERANCE X.X: ± 0.25 X.XX: ± 0.20 X.XXX: ± 0.10 ANGULAR: ± 1°		PRODUCT NO. : XNT-FFC16-111144		CHECK: JANY		DATE: 2015/09/01	
		DRAWING NO. : XNT-1017		APPROVED: JEFF		DATE: 2015/09/01	
				SCALE: 1:1	DWG ID: P D	REV.: A	PAGE: 1 of 1

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				
3				