

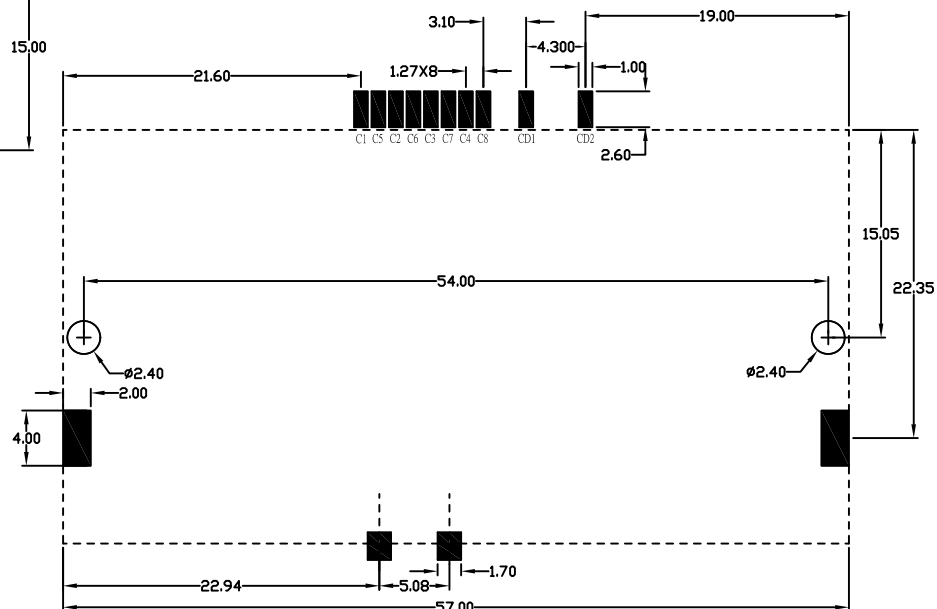
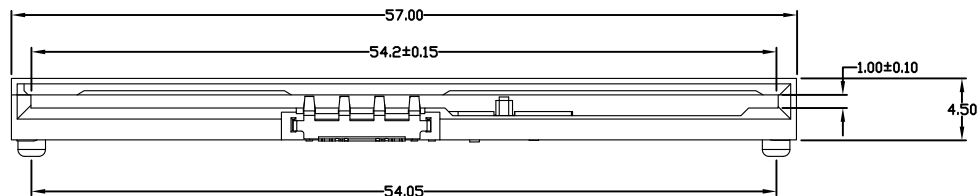


1.CARD INSERTION SPECIFICATION
 A. CARD INSERTION DEPTH:35.3 MM.
 B. CARD THICKNESS=0.7-0.8 MM.
 2.MATERIAL AND FINISH:
 A. HOUSING: LCP UL 94-V0 COLOR: BLACK.
 B. CONTACT:PHOSPHOR BRONZE.SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ONLY ON TAIL ZONE.
 C. SWITCH:PHOSPHOR BRONZE.SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ONLY ON TAIL ZONE.



RECOMMENDED PCB LAYOUT
 TOL:±0.05

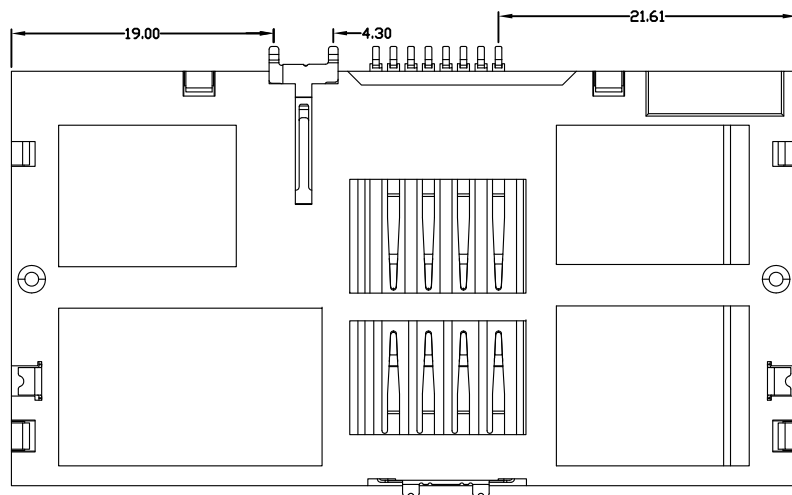

| | | | | | |
|--|------------------------------------|---|---|------------------|---------------------|
| | | 深圳市鑫南天科技有限公司 Shenzhen XinNanTian Technology Co., Ltd | | | |
| | | DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE | PRODUCT NAME : Smart Card connector 4.5H | DRAWING: COCO | DATE: 2014/01/15 |
| DIMENSION TOLERANCE X.X: ± 0.38 X.XX: ± 0.25 X.XXX: ± 0.10 ANGULAR: ± 1° | PRODUCT NO. : XNT-SC-803-08450A | CHECK: AG | DATE: 2014/01/15 | | |
| | DRAWING NO. : XNT-SC-803-08450A | APPROVED: JEFF | DATE: 2014/01/15 | | |
| | | SCALE: NA | DWG ID: P D | REV.: A | PAGE: 1 OF 1 |

| REVISION NO. | ECR NO. | DESCRIPTION | MARK | DATE |
|--------------|---------|-------------|------|------|
| 1 | | | | |
| 2 | | | | |
| 3 | | | | |