


NOTE:

1. MATERIAL AND FINISH:
 - A. HOUSING: PBT UL 94-V0 COLOR: BLACK.
 - B. CONTACT: PHOSPHOR BRONZE. SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ON TAIL ZONE(RoHS).
 - C. SWITCH: PHOSPHOR BRONZE.SELECTIVE PLATING AU OVER 50u" NI MIN UNDERPLAT SN ON TAIL ZONE(RoHS).
2. CARD INSERTION SPECIFICATION
 - A. CARD INSERTION DEPTH: 35.5 MM.
 - B. CARD THICKNESS=0.7-0.8 MM.

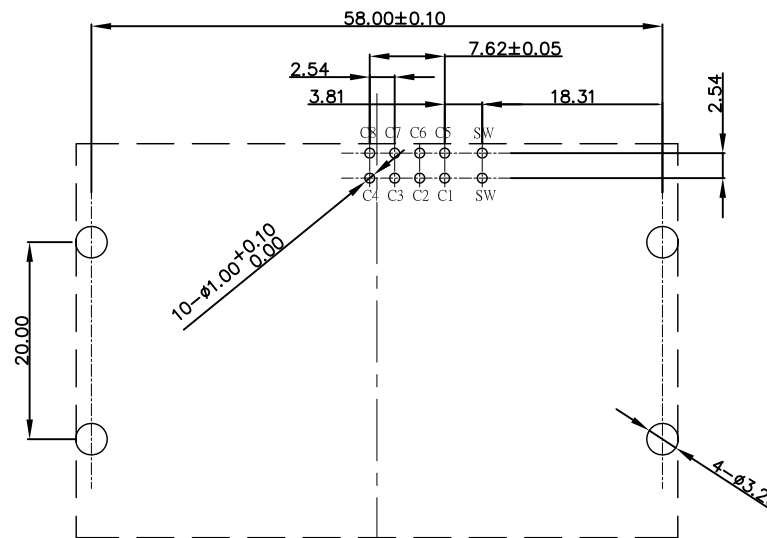

RECOMMENDED PCB LAYOUT
TOL.:±0.05

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				
3				

	深圳市鑫南天科技有限公司 Shenzhen XinNanTian Technology Co., Ltd			
	DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE DIMENSION TOLERANCE X.X: ± 0.38 X.XX: ± 0.25 X.XXX: ± 0.10 ANGULAR: ± 1°	PRODUCT NAME : Smart card connector 11.45H 无鱼叉 PRODUCT NO. : XNT-SC-805-081145A DRAWING NO. : XNT-SC-805-081145A	DRAWING: COCO CHECK: AG APPROVED: JEFF	DATE: 2014/01/15 DATE: 2014/01/15 DATE: 2014/01/15