


贴片时正反贴须告知，正反贴生产工艺有区别

* 所有原料材质, 生产制程, 电镀必须符合ROHS要求

版权所有为：深圳市鑫南天科技有限公司，网址：<http://www.sznantian.com>

由 Autodesk 教育版产品制作

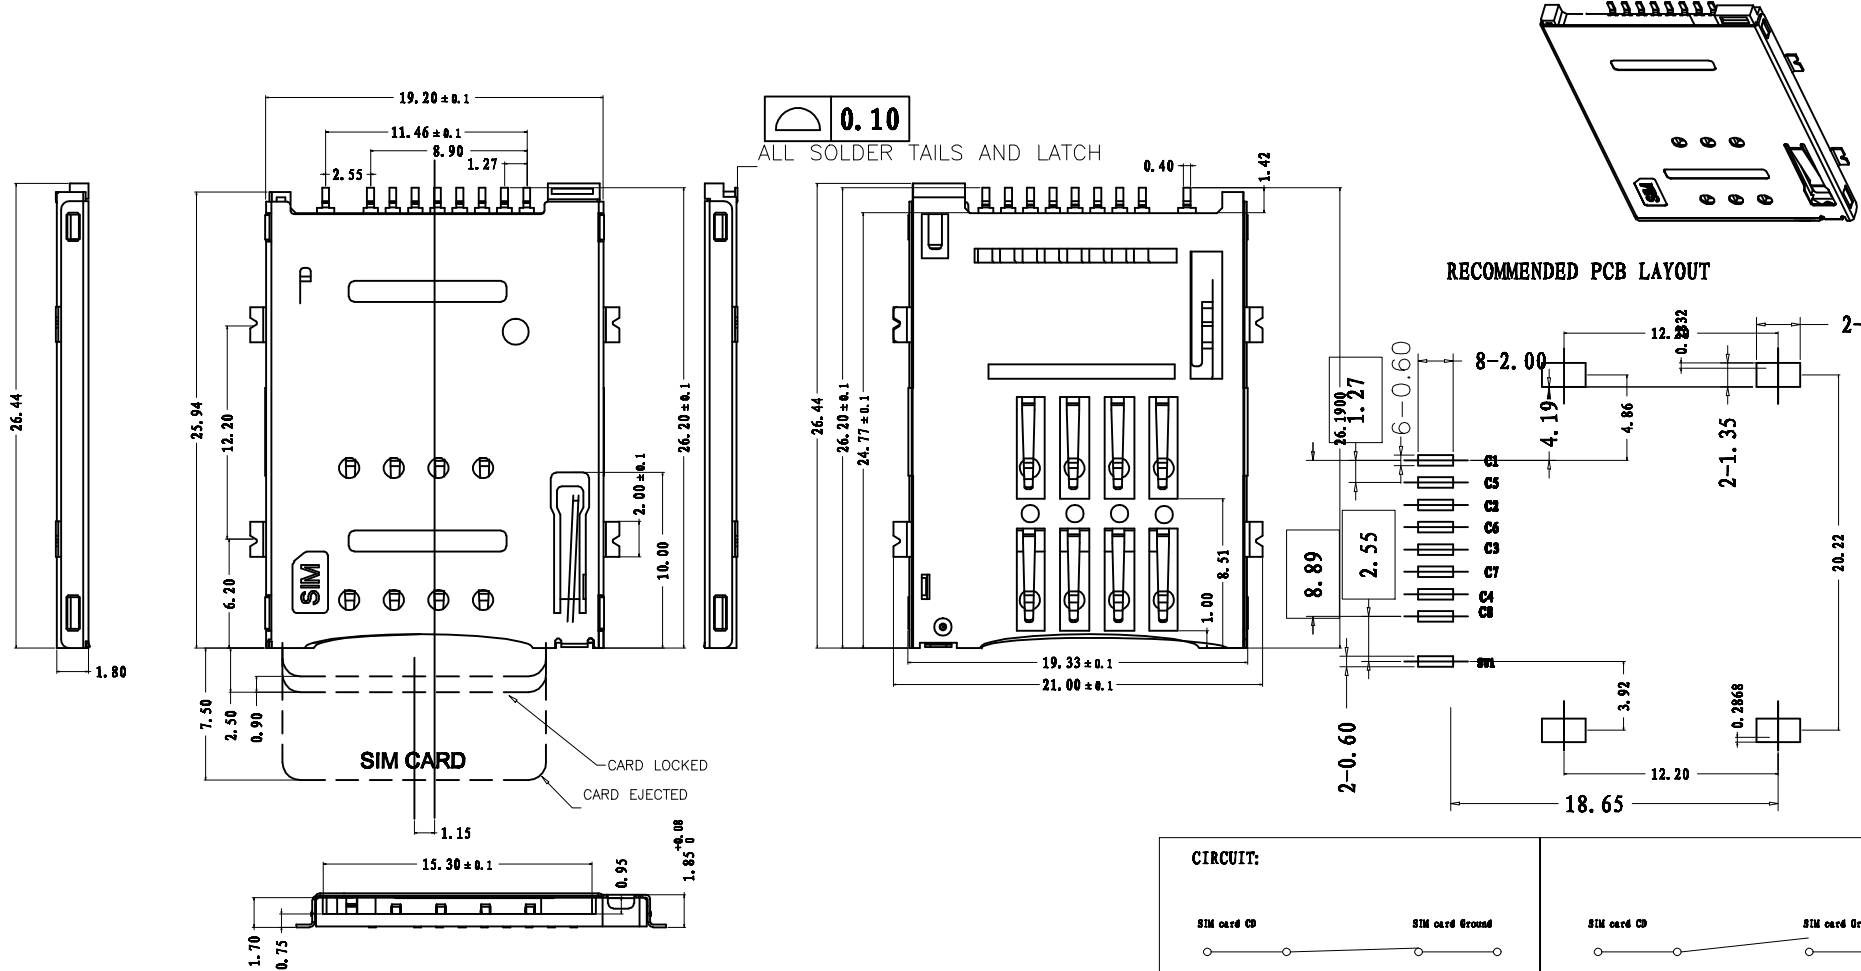


- 1.SPECIFICATIONS
 INSULATION RESISTANCE: 500M min.AT DC 500V DC
 WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
 CONTACT RESISTANCE: 100M max. AT 10MA/20mV max
 CURRENT RATING: 0.5A
 VOLTAGE RATING: 5.0 Vrms
 OPERATING TEMP.RANGE:-55 C+85 C
 MATING CYCLES: 5000 INSERTIONS

- 2.MATERIAL:
 INSULATOR: H-TEMPERATURE PLASTIC,UL 94V--0,
 COLOR:BLACK
 TERMINAL: COPPER ALLOY,T=0.15mm
 SHELL: STAINLESS STEEL,T=0.15mm

- 3.FINISH:
 TERMINAL:50u" min NICKEL UNDERPLATED ON ALLOVER,GOLD PLATING
 ON CONTACT ARER, 80u"min TIN ON SOLDER TAIL.
 SHELL:50u" NICKEL UNDERPLATED ON ALLOVER, GOLD FLASH ON SOLDER
 LATCH

SIM pin assignment	
Pin#	Name
C1	VCC 电压
C2	RST 重置
C3	CLK 时钟
C4	Reserved 备用
C5	GND 接地
C6	VPP 电压
C7	I/O 输入输出
C8	Reserved 备用

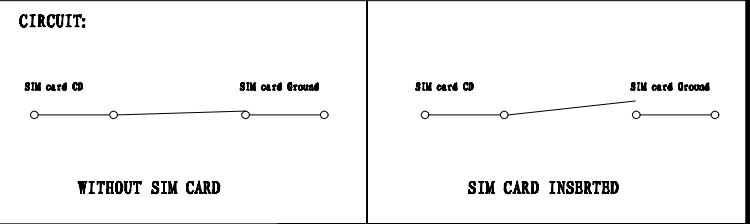

REVISION NO.	ECR NO.	DESCRIPTION	MARK	DATE
1				
2				

	深圳市鑫南天科技有限公司 Shen zhen Shi Xin Nan Tian Industrial Co., Ltd			
	DIMENSIONS INIT: mm UNLESS OTHERWISE SPECIFIABLE DIMENSION TOLERANCE X.X: ± 0.25 X.XX: ± 0.10 X.XXX: ± 0.05 ANGULAR: ± 1°	PRODUCT NAME : SIM PUSH 8P+1P无柱	DRAWING: COCO	DATE: 2012/05/10
	PRODUCT NO. : 0111AAAS06A	CHECK: JANY	DATE: 2012/05/10	
	DRAWING NO. : XNT-001	APPROVED: JEFF	DATE: 2012/05/10	
		SCALE: 1:1	DWG ID: P D REV.: A PAGE: 1 OF 1	